



Add: Building G, Runhe Industrial Zone, Zhentou Industrial Avenue, Xinqiao Street,
BaoAn ShenZhen, Guangdong Province, China.


Tel: 0755-23200658, 23200758, 23200858

Fax: 0755-23200958

Web: [Http://www.flourishe.com](http://www.flourishe.com)

E-mail: sales@flourishe.com

FL-608 Type Axial Lead Former UK Type

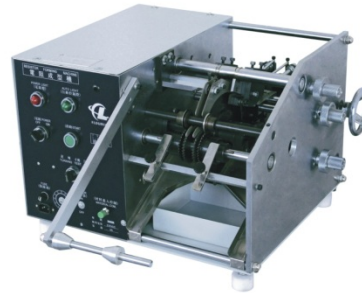

FL-608MB type

Spec

Input Power: 110V/220V AC 60HZ/50HZ

Size: L1050*W550*H650MM

Speed: 6600PCS/H

Weight: 100KG

Power: 250W

Air pressure: 4-6kg/cm²

	A	本体长度	3.8-20
	B	本体大小	2.3-8
	C	肩距	1.2min
	D	高度	3-12(固定值)
	E	脚长	可调
	S	支持点	2-3
	L	两脚宽度	A+2C
W	线径	Φ0.4-Φ1.3	
		加工量	110PCS/MIN



Features

- Three Models each for both M&C types. The differences are listed as follows.
- FL-608-MA/CA for Loose packed components.
- FL-608-MB/CB for taped packed components.
- FL-608-M/C for using on both taped and loose packed components.